

Lexmark E340 & E342n



- High speed laser printing at up to 30 ppm
- PCL 6 and PostScript 3 emulations support a broad range of platforms and applications
- Supports up to 800 sheets of input
- Easy-to-use operator panel simplifies setup and operation

LEXMARKTM

Lexmark E340 & E342n



- 1200 x 1200 dpi resolution delivers high-quality output for text and graphics
- Advanced auto-compensator technology for reliable paper handling
- Built tough with a rugged 15,000-page-per-month maximum duty cycle

Lexmark E340, E342n


Product Specifications

Part Number	US/Canada: 28S0500 (E340), 28S0600 (E342n)
Product Class	Desktop laser printer
Speed	Up to 30 ppm
Resolution	1200 x 1200 dpi, 2400 image quality, 1200 image quality, 600 x 600 dpi
Time to First Page	As fast as 7.5 seconds
Processor	366 MHz
Memory (std./max.)	32MB/160MB
Connectivity	
Standard	E340: Parallel, US E342n: Parallel, USB, Ethernet
Optional	E340: Ethernet, Token-Ring, Serial, Wireless E342n: Token-Ring, Serial, Wireless
Network Mgmt. Utility	MarkVision Professional
Operating Systems	Windows, Mac, Novell, UNIX, Linux For a complete list, visit www.lexmark.com.
Printer Languages	PostScript 3 and PCL 6 emulations; PPDS Migration Tool
Fonts	PCL: 89 scalable and 2 bitmapped. Includes OCR-A, OCR-B and Code 3 of 9 bar codes. PostScript: 89 scalable. PPDS: 39 scalable and 5 bitmapped
Size (WxDxH)	15.6 in. x 13.9 in. x 9.8 in. (396 mm x 353 mm x 249 mm)
Weight	22 lb. (10 kg)
Acoustics	52 dBA printing; 27 dBA idle
Duty Cycle	15,000 pages per month
Warranty	1-year Advanced Exchange

Media Specifications

Paper Capacity	
Standard Input	251 (250+1)
Maximum Input	801 (250+550+1)
Standard Output	150 top or 1 rear
Maximum Output	150 top or 1 rear
Paper Sources	
Standard Input	2
Maximum Input	3
Standard Output	150 top or 1 rear
Maximum Output	150 top or 1 rear
Media Types	Paper, paper labels, transparencies, envelopes, card stock
Media Sizes	Letter, A4, A5, JIS B5, Legal, Executive, Folio, Statement, Universal (3.0 in. x 5.0 in. to 8.5 in. x 14 in.), envelopes (7 ^{3/4} , 9, 10, C5, B5, DL)
Media Weights	Plain paper: 60-163 g/m ² ; card stock: up to 90 lb. Index

In the Box



Lexmark E340

- Lexmark E340 printer
- 1,500-page Starter Return Program Toner Cartridge¹
- Photoconductor Kit (up to 30,000 pages)
- Power Cord
- Dust Cover
- Publications CD
- Drivers & Utilities CD
- Setup Sheet
- Supplies Return Program Flyer

Lexmark E342n

- Lexmark E340
EXCEPT
- 2,500-page instead of 1,500-page Starter Return Program Toner Cartridge¹
- PLUS**
- Ethernet


Lexmark E340 & E342n

Supplies & Accessories

Part Number

Supplies		Part Number
2,500-page Return Program Print Cartridge ¹		24015SA ²
2,500-page Print Cartridge ¹		24035SA ²
6,000-page Return Program High-yield Toner Cartridge ¹		34015HA ²
6,000-page High-yield Toner Cartridge ¹		34035HA ²
Photoconductor Kit (up to 30,000 pages)		12A8302
Memory Options		Part Number
32MB SDRAM		16H0057
64MB SDRAM		16H0058
128MB SDRAM		16H0059
32MB Flash Memory		1021208

Paper Handling Options⁵

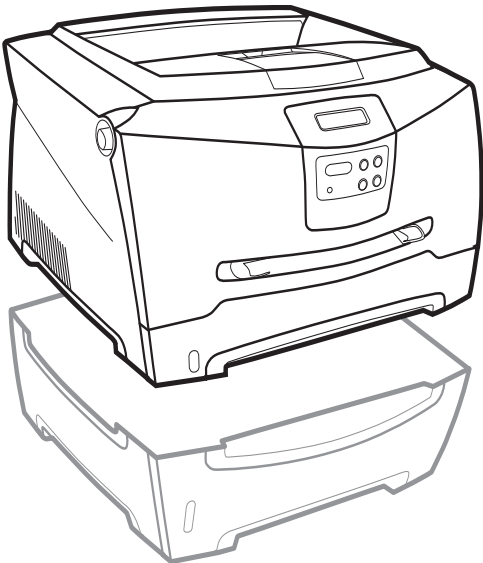

- Single-sheet Multipurpose Feeder (standard)
- 250-sheet Drawer (standard)
- 550-sheet Drawer (28S0802)

Additional Information

¹ Declared yield value in accordance with ISO/IEC 19752

² Designed for use only in the United States and Canada

³ Displays all available options for **base** model

Lexmark E340 & E342n

Additional Accessories

Connectivity	MarkNet X2000 Series External Print Servers ¹	
	X2011e Ethernet 10/100BaseTX	46D0060
	X2012e Ethernet 10/100BaseTX/10Base2	46D0040
	X2031e Ethernet 10/100BaseTX (3 ports)	46D0020
	X2030t Token-Ring (3 ports)	46D0000
	MarkNet N4000 Series External Print Servers ²	
N4000e Ethernet 10/100BaseTX	14T0030	
Wireless		
N4050e 802.11g Print Server ²	14T0145	
Attachment Options	50-foot Serial cable	1038693
	6-foot USB cable	12A2405
	10-foot Parallel cable	1329605
	External Serial Adapter	1368705
Application Solutions	Japanese Font Card	1021243
	Korean Font Card	1021240
	Simplified Chinese Font Card	1021241
	Traditional Chinese Font Card	1021242
Print Media	Transparencies – letter (50 sheets)	70X7240

¹ Uses parallel connection

² Uses USB connection

Lexmark and Lexmark with diamond design are trademarks of Lexmark International, Inc., registered in the United States and/or other countries. PCL is a registered trademark of Hewlett-Packard Company. The USB-IF logo is a trademark of Universal Serial Bus Implementers Forum, Inc. All other trademarks are the property of their respective owners. © 2005 Lexmark International, Inc. All rights reserved.

71K1190



Printed on recycled paper.

